



AGR-751-PF85	AGR-751-PF
ACG-751-PF85	ACG-751-PF

AGRE-751-PF85	AGRE-751-PF
ACGE-751-PF85	ACGE-751-PF

mod.	rango range °C	largo length (mm) PF85	largo length (mm) PF8	alto height (mm)	fondo depth (mm)	niveles levels	estantes shelves GN 2/1	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825
AGR-751	-2°C +8°C	710	645	2060	800	24	3	533	230V-50Hz	R134a R290*	304 505	293 243	D C
ACG-751	-20°C -15°C	710	645	2060	800	24	3	533	230V-50Hz	R290 R452A*	606 452	491 619	E F
AGRE-751	-2°C +8°C	710	645	2060	800	24	4	533	230V-50Hz	R134a R290*	304 505	304 254	- -
ACGE-751	-20°C -15°C	710	645	2060	800	24	4	533	230V-50Hz	R290 R452A*	606 452	505 630	- -

\*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Costados en acero inox AISI-304-con 24 embuticiones para apoyo de parrillas y cubetas GN 1/1 o GN 2/1
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Cerradura con llave, de serie
- Luz interior LED
- Estantes interiores GN 2/1, de alambre en acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos elevable para acceso a unidad condensadora
- Sistema frigorífico **monobloque**, evaporador + unidad condensadora
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche del evaporador
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero GWP y cero ODP
- **PF85**: 85 mm aislamiento
- **PF**: 60 mm aislamiento
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- **AGR-PF / PF85**: temperatura de trabajo 16°C a 43°C ambiente

**AGR / ACG:** Puerta inox - solid door  
**AGRE:** Puerta doble cristal - double glazed door

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- AISI-304 stainless steel inner sides, 24 press-formed supports for GN 2/1 containers or shelves
- Inner side of doors by stamped steel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 200 mm
- Hinged front control panel, allows easy access to the condenser unit
- **Monoblock** refrigeration system: condenser unit + evaporator
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero GWP and zero ODP
- **PF85**: 85 mm insulation
- **PF**: 60 mm insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- **AGR-PF / PF85**: operating ambient temperature 16°C to 43°C

OPCIONES	OPTIONS	€
parrilla reforzada botelleria	bottles reinforced shelf	
hidrocarburo	hydrocarbon	
parrilla adicional GN 2/1	GN 2/1 extra shelf	
barras carniceras	bars for meat set	
set 4 ruedas	4 castors set	
registrador de alarmas HACCP	HACCP alarm recorder	
respaldo inox	stainless steel rear side	
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	
cambio R452A por R290	R452A to R290	

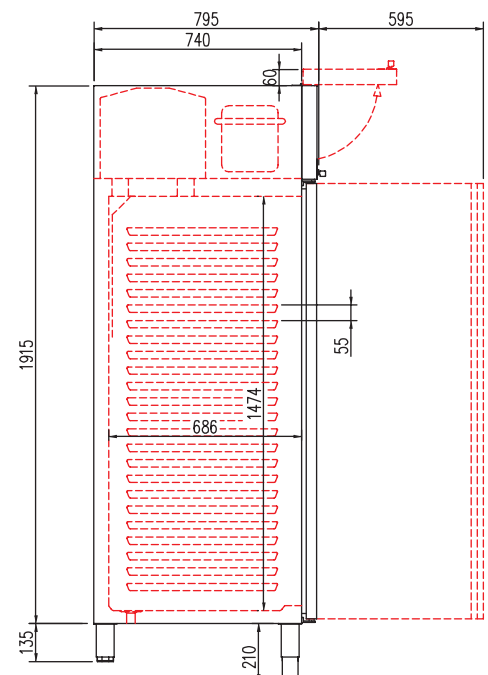

all photos must be considered as a reference - fotografías no contractuales

MONOBLOCK



AGR-751-PF85

Electrónica alto rendimiento  
High performance electronic system

Interior redondeado con desagüe  
Rounded corners

Contrapuerta embutida  
Press-formed rear side door

Modelos PF85 models

Aislamiento 40 Kg/cm<sup>3</sup> x 85 mm  
40 Kg / cm<sup>3</sup> x 85 mm insulation

