



SD-27
SDN-27




SD-48
SDN-48



SD-60
SDN-60



SD-72



SD: Incremento precio por cambio de puerta a cajonera doble, sistema autocierre
SD: Door to double drawers set, soft-closing system, increase of price

455 €

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves uds	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
SD-27	-2°C +8°C	701	915	805	2	204	230V-50Hz	R134a	304	379
								R290	502	264
SD-48	-2°C +8°C	1228	915	805	4	394	230V-50Hz	R134a	352	330
								R290	560	273
SD-60	-2°C +8°C	1532	915	805	4	500	230V-50Hz	R134a	485	455
								R290	739	457
SD-72	-2°C +8°C	1837	915	805	6	606	230V-50Hz	R134a	540	470
								R290	739	462
SDN-27	-20°C -15°C	701	915	805	2	204	230V-50Hz	R290	398	467
								R452A	452	589
SDN-48	-20°C -15°C	1228	915	805	4	394	230V-50Hz	R290	606	602
								R452A	542	690
SDN-60	-20°C -15°C	1532	915	805	4	500	230V-50Hz	R290	606	610
								R452A	542	708

US RANGE • GAMA AMERICANA

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.


- Exterior e interior en acero, respaldo en chapa galvanizada
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Encimera inox AISI-304
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Ruedas de serie (2 con freno + 2 sin freno)
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero efecto ODP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 38°C ambiente

- Stainless steel interior and exterior, rear side galvanized panel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- AISI 304 stainless steel worktop
- Shelves made of plasticized steel wire, height adjustable
- Castors as standard (2 with brakes + 2 without)
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero GWP and zero ODP effect
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 38°C ambient



SD-72
con cajoneras opcionales
with optional drawers sets

OPCIONES	OPTIONS	€
encimera con peto	splachback worktop	
set 4 patas	4 legs set	
set 6 patas	6 legs set	
respaldo inox	stainless steel rear side	
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	
tropicalizado 43°	tropicalized to 43°	
cambio R134a por R290	R134a to R290	
cambio R290 por R452A	R290 to R452A	

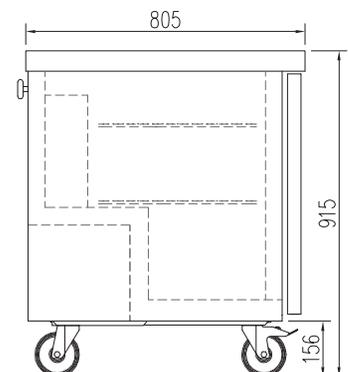

all photos must be considered as a reference - fotografías no contractuales



SD-27



SD-60